

4 EASY STEP INSTRUCTIONS:

For Permanent Install please call office or see local Marine Service Center


1- Secure 2 nozzles along front and Back side of Bimini



Step 1: Plug black misting line/tubing into outlet filter (same filter that has black tubing going into it). Now simply attach misting line to overhead apparatus with supplied clips or zip ties.

-NOTE- All tee connectors and misting nozzles are quick disconnects for easy custom fitting to your bimini or tower (simply push tubing in, hold connector and pull).

Cut line to Desired Length for Nozzle Placement



Step 2: Find water source. Plug red water supply line/tubing into inlet filter (same filter that has red tubing going into it). Now drop weighted end of red supply line to water source. Example: Water Container, Onboard Galley area water source –or- Draw Water from a Fresh water Lake. ***Onboard Water T-Connectors & 7 Gallon Container available***

2-Find Water Source-
Onboard Water or Fresh Water Lake


Water Line



Step 3: Mount Pump > Find Best location to secure pump by bolting on Mounting Bracket.



Step 4: Connect 12v power plug to power Source –OR- have wired to an on/off switch.

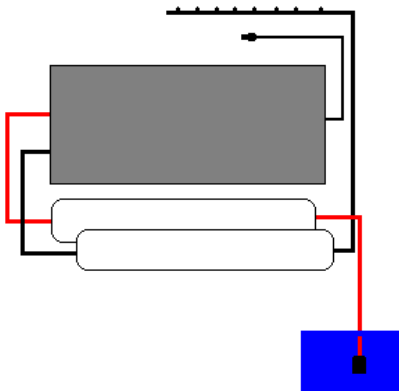

← Pump Diagram

***NOTE – Please allow 2 minutes for water to purge through system.
With first time use its works faster if you let water flow through the system before Plugging Black Misting line into outlet filter***